



SOFTCOOKER XP

sous vide cooking system


- Riscaldatore termoregolato ad alta precisione.
- Visualizzatore di temperatura e tempo esercizio.
- 25 programmi memorizzabili.
- Partenza posticipata programmabile.
- Struttura in acciaio inox IP X3.
- Profondità di lavoro max 16,5 cm.
- Dispositivo di protezione automatico in caso di utilizzo a secco.
- Ventola di circolazione per favorire una ottima miscelazione del prodotto.
- Dispositivo di blocco motore se rilevata sovratensione e sovratemperatura.

Opzioni

- Vasca 1/1 GN inox con coperchio
 - Vasca 2/1 GN inox con coperchio
 - Divisorio buste sottovuoto
 - Coperchio vasca per un maggior isolamento termico e una minor dispersione di calore - Energy Saving!
- High precision warmer with temperature control.
 - Working temperature display.
 - 25 storable programs.
 - Programmable postponed departure.
 - IP X3 protection rated stainless steel structure.
 - Can be applied to the pot by means of a clamp. (max depth 16,5 cm)
 - Protection device switches off the warmer in case of accidental use outside the liquid.
 - Circulating pump to help the best product mixing.
 - Temperature sensor to prevent overload and overheating.

Optionals

- 1/1 GN s/steel container with lid
- 2/1 GN s/steel container with lid
- Vacuum bags dividing
- Lid for better thermal insulation and less waste of heat - Energy Saving!

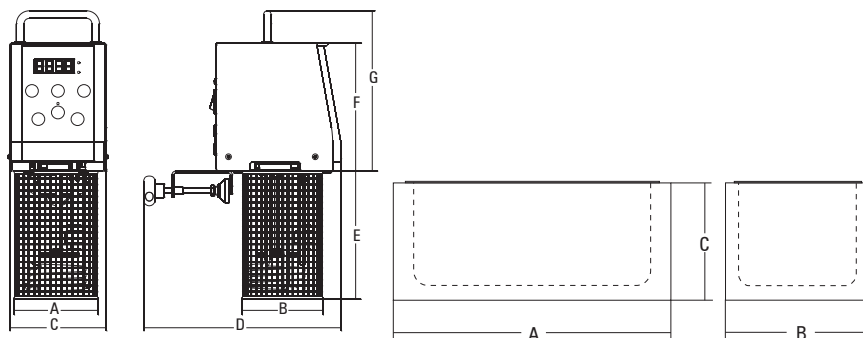

						A	B	C	D	E	F	G			
	watt	1ph	°C	lit	lit	mm	mm	mm	mm	mm	mm	mm	kg	mm	kg
Softcooker XP	2.000	1ph	24÷99	-	-	110	105	130	260	170	170	210	4.5	330x455x240	5.5
1/1 GN	-	-	-	27	22	565	360	230	-	-	-	-	7.7	720x500x350	11.5
2/1 GN	-	-	-	57.5	43	650	530	230	-	-	-	-	13	750x650x400	16


Optionals



Supporto vasche
Containers support



2/1 GN



Divisorio buste sottovuoto
Vacuum bags dividing



1/1 GN

Vasca inox con coperchio 1/1 e 2/1 GN
S/steel container with lid 1/1 and 2/1 GN